SPECIFICATIONS

6M²

FUEL TYPE

HEAT AREA

CLEARANCE

RATED CURRENT

MINIMUM FLOOR

MOUNTING OPTIONS

CEILING MOUNT

WALL MOUNT

MOUNT

ON | OFF

DIMMER

RECESSED | FLUSH

CONTROL OPTIONS

CEILING POLE MOUNT 🖌

MASTER REMOTE *

FREESTANDING _

 \checkmark

COLOUR

Reference the specification guide below to help you select the correct solution for your needs.

MODEL NUMBER 2000 SERIES 3000 SERIES 4000 SERIES 6000 SERIES

ELECTRIC ELECTRIC ELECTRIC ELECTRIC

BLACK | WHITE BLACK | WHITE BLACK | WHITE BLACK | WHITE

9M² 12M² 15M²

230 - 240V/8.3A 230 - 240V/12.5A 230 - 240V/16.6A 230 - 240V/25A

 \checkmark

 \checkmark

WALL 1800MM CEILING 2400MM WALL 1800MM CEILING 2400MM

 \checkmark

 \checkmark

 \checkmark \checkmark \checkmark

 \checkmark

 \checkmark

- - -

 \checkmark

 \checkmark \checkmark \checkmark

PROFILE





CEILING RECESS



2000W & 4000W



* Control up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 30m of heaters.

Measurements displayed within this document are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this document are displayed in mm.

EXPLORE THE POSSIBILITIES

With Bromic Smart-Heat[™] complimentary de service, designing a solution to optimise the heating for your outdoor spaces is simple.

> Learn more... bromic.com/designservice

ASIA PACIFIC | NORTH AMERICA | EURO

DIMENSIONS

With a wide range of sizes available, find the ideal heater to suit your outdoor space.


MOUNT OPTIONS

With a wide array of mounting options, Bromic offers solutions to complete any décor and provide functionality for ambiance and comfort.


CEILING & WALL MOUNT

CEILING MOUNT CLEARANCE

WALL BRACKET





CEILING POLE CLEARANCE



HEATING REACH

Creating ideal comfort levels, Bromic heaters offer a variety of heat distribution to suit your outdoor heating needs.

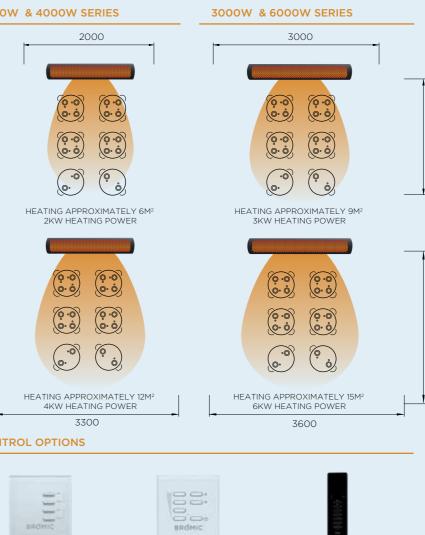

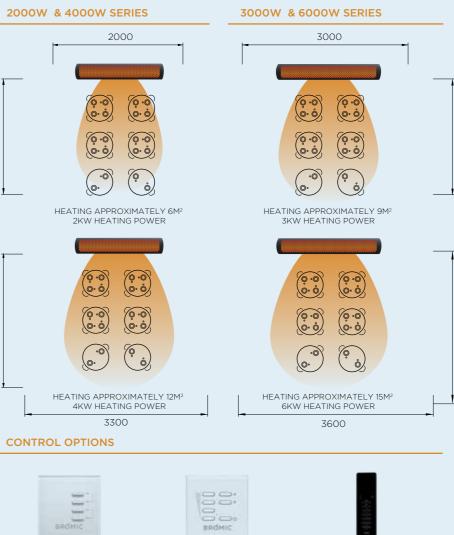


CONTROL OPTIONS

	35	
	22	
	11125	


ON | OFF CONTROL


2000W & 4000W 3000W & 6000W CEILING RECESS CEILING RECESS FRAME 2000W & 4000W CEILING RECESS FRAME 3000W & 6000W







MINIMUM CEILING CAVITY









DIMMER CONTROL

MASTER REMOTE



SMART-HEAT[™] ELECTRIC

TUNGSTEN SMART-HEAT[™] ELECTRIC

EXTEND THE BOUNDARIES OF INSIDE SPACE, BY INCLUDING THE OUTDOORS. CONTROL THE CLIMATE IN YOUR NEXT PROJECT WITH BROMIC SMART-HEAT™.

PATENTED PERFORMANCE

HIGH PERFORMANCE

TOTAL MOUNTING FLEXIBILITY

ANGLED BRACKET

UNIQUE DESIGN