

Emitter replacement instruction for IP67 mod. RCA

Tools needed to replace the emitter :
hexagon-socket wrench (No. 3),
flat screwdriver, sidecutter, crimp tool, cotton gloves.

RCA Dismounting



dismounting - step 1




dismounting - step 2




dismounting - step 3




dismounting - step 4

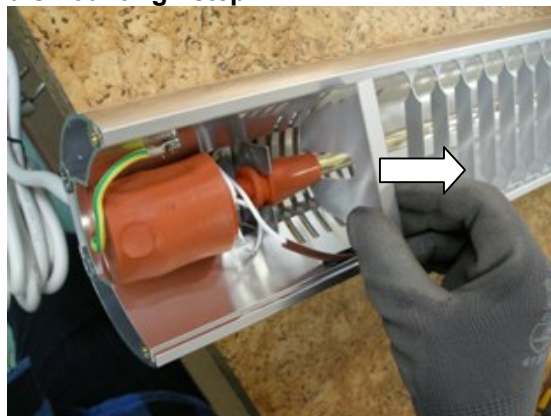

dismounting - step 5

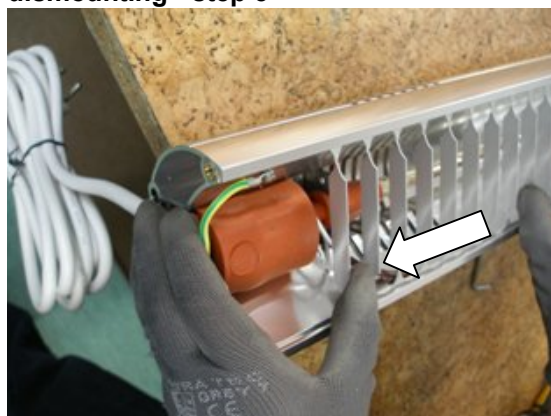

dismounting - step 6

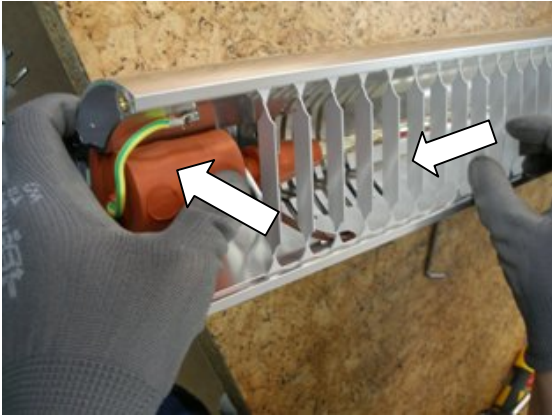


dismounting - step 7



dismounting - step 11



dismounting - step 8

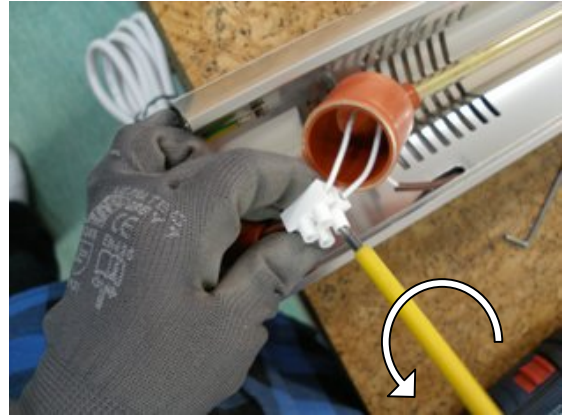

dismounting - step 12



dismounting - step 9




dismounting - step 13




dismounting - step 10



dismounting - step 14

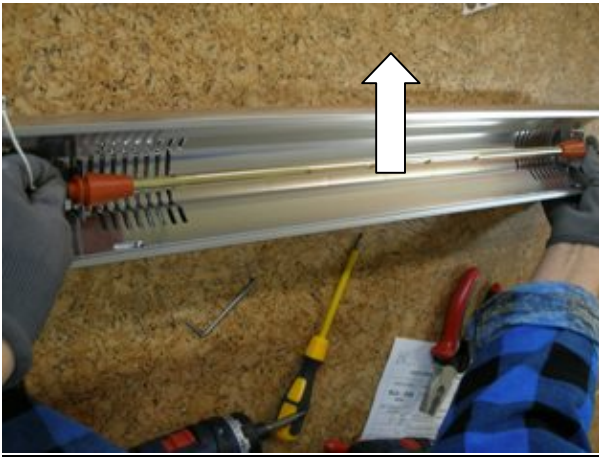

dismounting - step 15

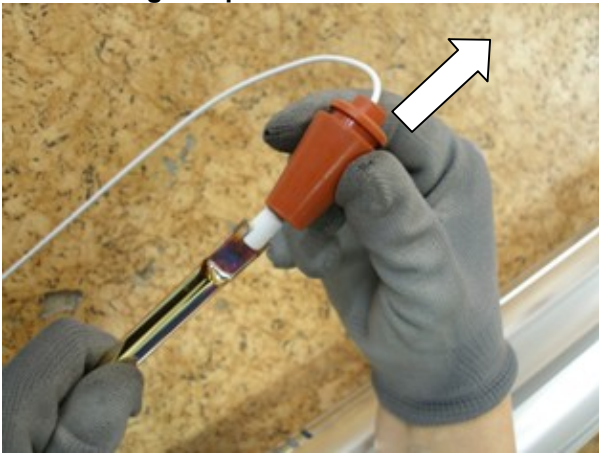

dismounting - step 16

RCA Mounting

Do not touch quartz emitter with bare hands. If grease have been deposited on quartz, simply clean before lighting with cloth moistened with alcohol.



mounting - step 1




mounting - step 2




mounting - step 3



mounting - step 4

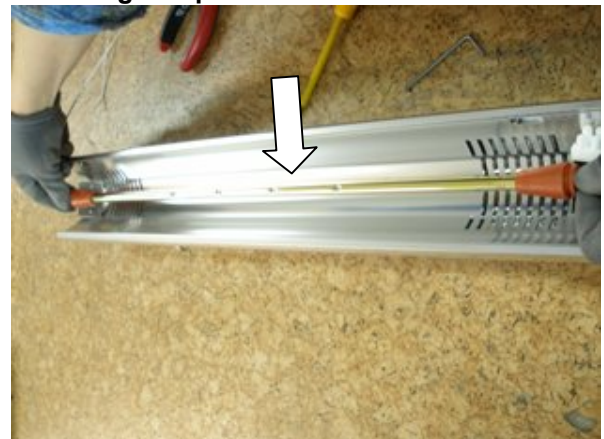


mounting - step 5

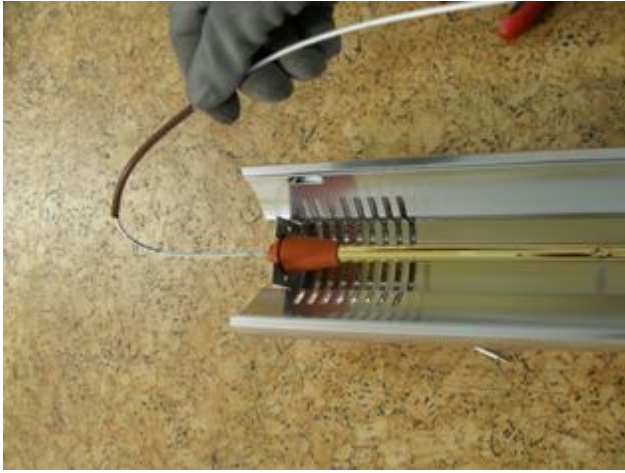


mounting - step 6




mounting - step 10

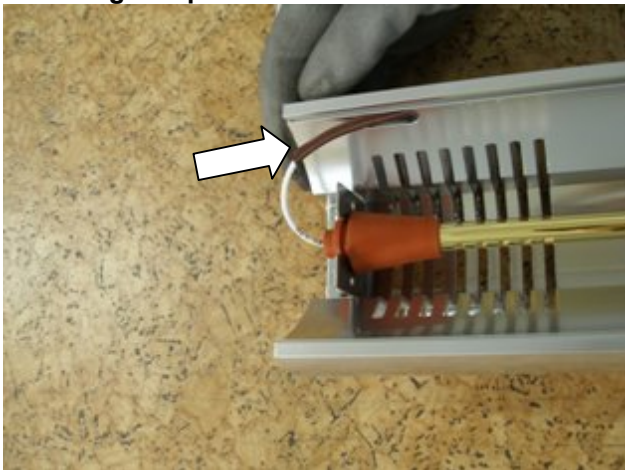

mounting - step 7

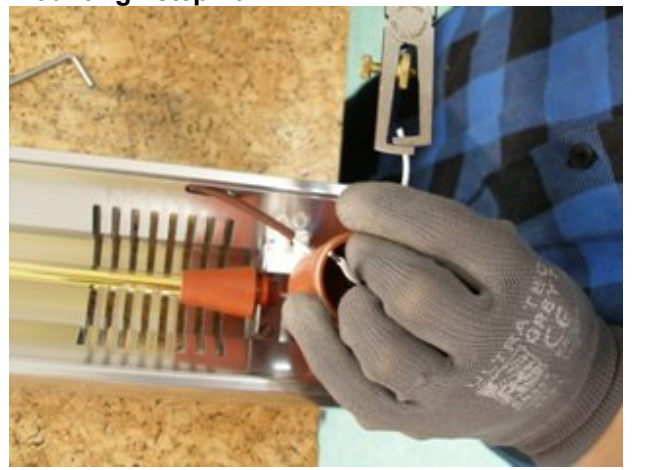


mounting - step 11

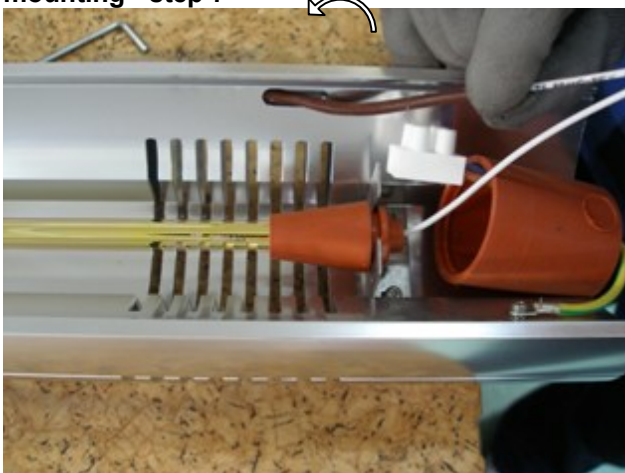

mounting - step 8



mounting - step 12

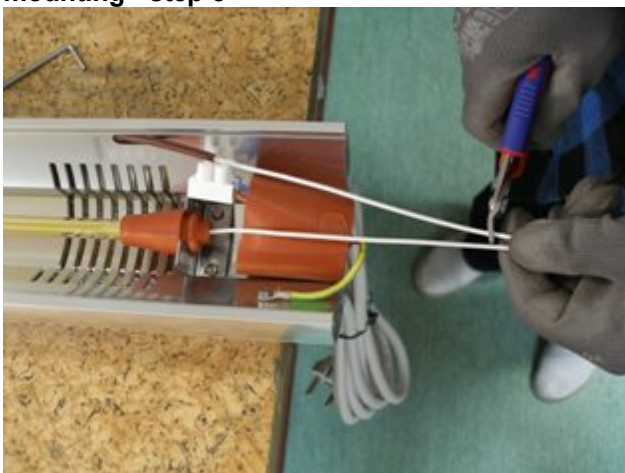


mounting - step 9



mounting - step 13



mounting - step 14

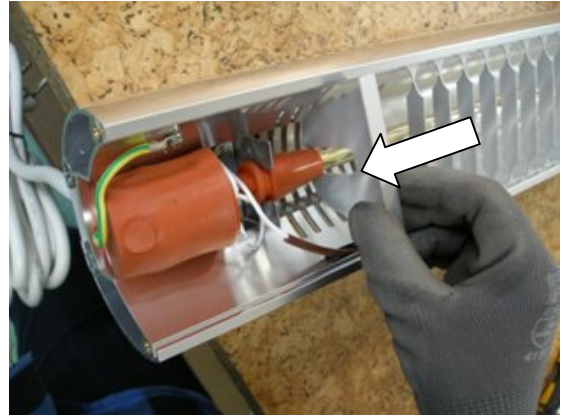

mounting - step 18



mounting - step 15



mounting - step 19



mounting - step 16



mounting - step 20



mounting - step 17



mounting - step 21



mounting - step 22